


## Compact and productive colour multifunctionals

These feature rich A4 multifunctional devices are designed for cost conscious businesses that require productive high quality colour communication for small workgroups. A compact design means they fit perfectly into small office environments.

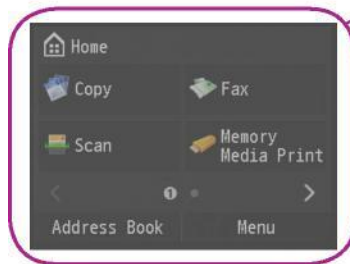

### Productivity:

- Simple operation with a 8.9 cm colour touch and swipe user interface
- A range of flexible mobile printing and scanning capabilities, such as Apple AirPrint™, Mopria printing and Canon's optional uniFLOW solution, support mobile worker efficiency
- Up to 2,300 sheet paper capacity for busy workgroups and departments in any size organisation
- Enhanced productivity and paper saving with auto duplex functionality
- Easily scan and send documents directly to a variety of destinations including email and shared folder
- Easy maintenance design for less downtime
- Canon's V<sup>2</sup> colour (Vivid and Vibrant) imaging technology ensures documents impress and stand out from the rest

### Security and cost control:

- Efficient, high quality colour printing thanks to separate toner and drum technology
- The functionality of many devices in one compact multifunctional device
- Documents remain secure with features such as secure print, pin release and optional PDF password protection
- Greater cost control and security with embedded support for Canon's optional uniFLOW software
- Canon's longer life drum technology reduces the need to replace consumables frequently

Compact and productive  
colour multifunctionals

# imageRUNNER C1325iF/C1335iF

### Integration and management:

- With their compact design, these devices fit into various office environments where space is a premium either as a desktop or floor standing
- Seamlessly integrate these devices into IT environments, supporting industry standards such as PCL and Genuine Adobe PS
- Reduce fleet management and administration burden with automated meter collection, consumables management, remote updating and diagnostics


### Energy efficient:

- Class-leading Typical Electricity Consumption (TEC)\* ratings
- Consumes as little as 1 W in sleep mode
- Rapid recovery from sleep mode
- ENERGY STAR® qualified
- Qualifies for the stringent Blue Angel Award\*\*

\* Typical Energy Consumptions as defined by ENERGY STAR  
<http://www.eu-energystar.org>

\*\*imageRUNNER C1325iF only

AirPrint™ and the AirPrint logo are trademarks of Apple Inc.

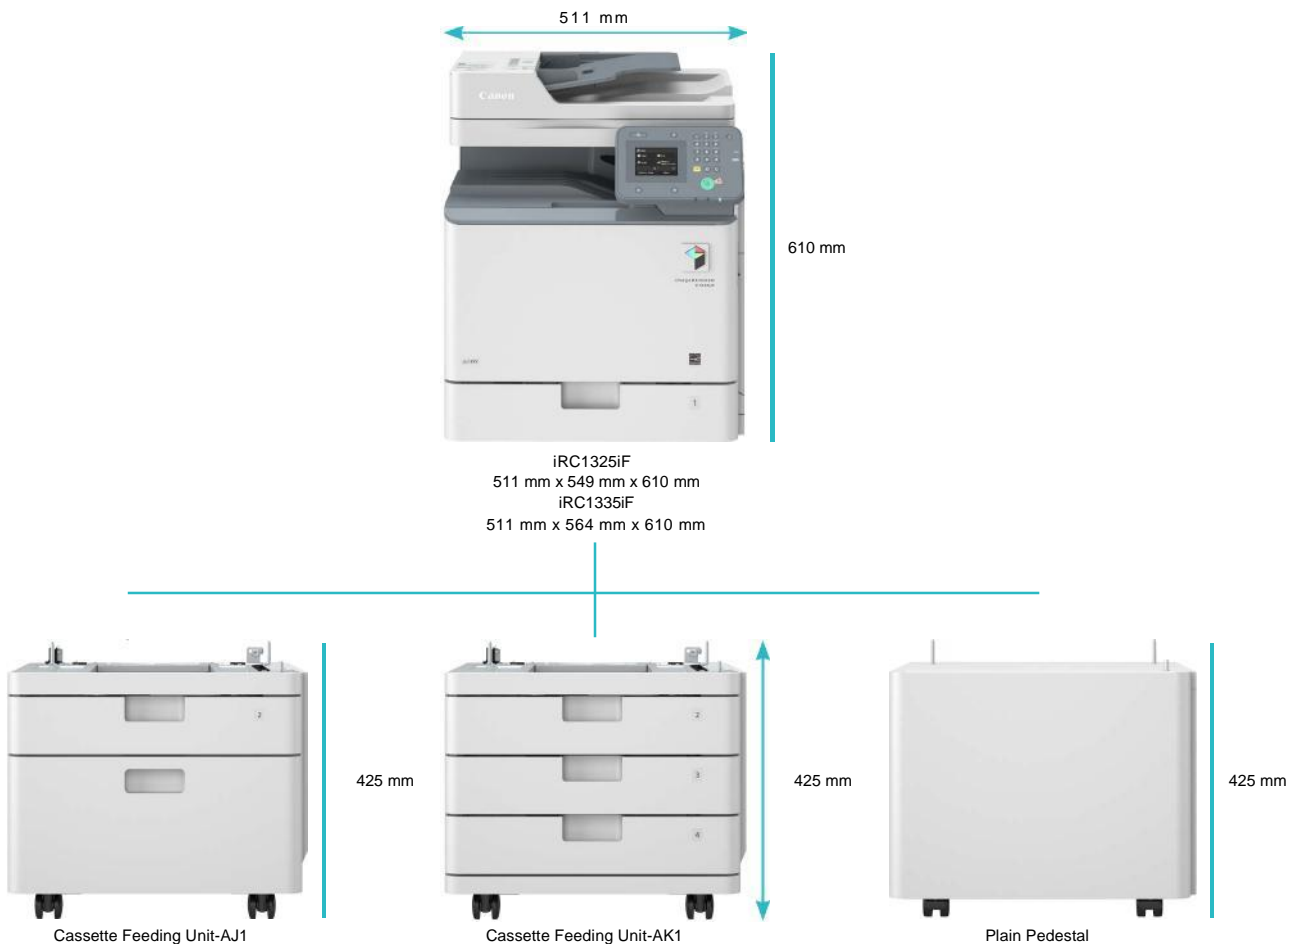

# imageRUNNER C1325iF/C1335iF Technical Specifications

<b>Machine type</b>	Colour A4 Laser Multifunctional (Reader / Printer standard)	<b>Supported media weight/s</b>	Single-sided scanning: 50 to 105 gsm (DADF) Double-sided scanning: 64 to 105 gsm (DADF)
<b>Available core functions</b>	Print, Copy, Scan, Send and Fax standard	<b>Scan resolution</b>	<u>BW Scan:</u> 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi <u>CL Scan:</u> 100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi 2-sided to 2-sided (Automatic)
<b>Printer Specifications</b>		<b>Double sided scanning</b>	2-sided to 2-sided (Automatic)
<b>Print speed (BW/Colour)</b>	C1335iF: 35/35ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 35/35ppm (A4 Double-sided), 26/26ppm (A5 Double-sided) C1325iF: 25/25ppm (A4 Single-sided), 26/26ppm (A5 Single-sided), 25/25ppm (A4 Double-sided), 26/26ppm (A5 Double-sided)	<b>Scan speed</b>	C1335iF: BW single-sided: 35 ipm (A4, 300 dpi X 300 dpi), BW double-sided: 11 ipm (A4, 300 dpi X 300 dpi) CL single-sided: 35 ipm (A4, 300 dpi X 300 dpi), CL double-sided: 11 ipm (A4, 300 dpi X 300 dpi) C1325iF: BW single-sided: 25 ipm (A4, 300 dpi X 300 dpi), BW double-sided: 9 ipm (A4, 300 dpi X 300 dpi) CL single-sided: 25 ipm (A4, 300 dpi X 300 dpi), CL double-sided: 9 ipm (A4, 300 dpi X 300 dpi)
<b>Printing method</b>	Colour Laser Beam Printing	<b>Scan methods</b>	Push Scan: Colour Send functionality is standard. Pull Scan: TWAIN / WIA Pull scanning available on all models. Scan to USB Memory Key: Available on all models Scan to mobiles, internet-connected devices: A range of solutions is available to provide scanning to mobile devices, internet-connected devices depending on your requirements. Please contact your sales representative for further information.
<b>Print resolution</b>	2400 dpi equivalent x 600 dpi, 600 dpi x 600 dpi	<b>Pull scan specifications</b>	TWAIN/WIA Pull scanning Windows XP Windows Vista/Windows 7/Windows 8/Windows 8.1 Mac Scan (TWAIN only) Mac OS X 10.5.8 or later *The drivers are available via <a href="http://software.canon-europe.com">http://software.canon-europe.com</a> .
<b>Double sided printing</b>	Automatic (Standard)	<b>Send Specifications</b>	Standard on all models
<b>Direct print</b>	Direct printing available from USB memory key Supported file types: JPEG, TIFF, PDF	<b>Optional/Standard</b>	100 dpi, 150 dpi, 200 dpi x 100 dpi, 200 dpi, 300 dpi, 200 dpi x 400 dpi, 400 dpi, 600 dpi
<b>Printing from mobiles or internet-connected devices and cloud-based services</b>	A range of software is available to provide printing from mobile or internet-connected devices. Please contact your sales representative for further information.	<b>Send resolution</b>	E-Mail, Fax, PC (SMB, FTP)
<b>Paper input (Standard)</b>	1 x 550-sheet (80 gsm) cassette, 100-sheet (80 gsm) multi-purpose tray	<b>Destinations</b>	LDAP (Max. 50 searchable), Local (Max. 300 including 281 Speed dials)
<b>Paper input (Option)</b>	1 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AJ1) 3 x 550-sheet cassette (80 gsm) (Cassette Feeding Unit-AK1)	<b>Address Book/Speed dials</b>	SMB : JPEG, TIFF, PDF, Compact PDF, Searchable PDF E-mail : PDF, Compact PDF, Searchable PDF
<b>Maximum paper input capacity</b>	2300 sheets (80 gsm)	<b>File formats</b>	Send PDF Security Feature Set-E1@E: Send encrypted PDF and add digital device signature to PDF files.
<b>Paper output capacity</b>	250 sheets (80 gsm)	<b>Optional Universal Send Feature Sets</b>	
<b>Finishing capabilities</b>	Standard: Collate, Group	<b>Fax Specifications</b>	Standard on all models
<b>Supported media types</b>	<u>Cassette/s:</u> Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Envelopes* *Envelope support via standard cassette 1 only. <u>Multi-purpose tray:</u> Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Transparency, Labels, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL)	<b>Optional/Standard</b>	Super G3 33.6 kbps (Up to 3 seconds per page <sup>1</sup> )
	<u>Paper cassette 1:</u> Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Envelopes (No.10 (COM10), Monarch, DL) Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	<b>Modem speed</b>	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi
<b>Supported media sizes</b>	<u>Paper cassettes 2, 3 and 4:</u> Standard size: A4, A5, B5, Legal, Letter, Executive, Statement Custom size (98.4 mm to 216 mm X 190.5 mm to 355.6 mm)	<b>Fax resolution</b>	Up to 512 pages <sup>1</sup>
	<u>Multi-purpose tray:</u> Standard size: A4, A5, B5, Legal, Letter, Executive, Statement, Custom size (98.4 mm to 216 mm x 148 mm to 355.6 mm), Envelopes (No.10 (COM10), Monarch, ISO-C5,DL)	<b>FAX memory</b>	Max. 281
<b>Supported media weights</b>	Cassette/s : 60 to 163 gsm Multi-purpose tray: 60 to 220 gsm Duplex: 60 to 163 gsm	<b>Speed dials</b>	Max. 199 dials
	UFR II, PCL5c/6, Adobe PostScript Level 3 (Standard on all models)	<b>Group dials/destinations</b>	Max. 310 addresses
<b>Page Description Language(s)</b>	PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts PS fonts: 136 Roman fonts	<b>Sequential broadcast</b>	Yes
<b>Fonts</b>	UFR II: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PCL: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2 PS: Windows XP / Server 2003 / Vista / Server 2008 / Windows 7 / Server 2008 R2 / Windows 8 / Windows 8.1 / Server 2012 / Server 2012R2, MAC OS X (10.5.8 or later) PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows XP / Windows Vista / Windows 7 / Windows 8 / Windows 8.1 Please refer to <a href="http://software.canon-europe.com/">http://software.canon-europe.com/</a> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place.	<b>Memory backup</b>	Fax Forwarding, Dual Access, PC Fax (TX only)
<b>Operating System compatibility</b>		<b>Other features</b>	
		<b>General Specifications</b>	
<b>Copy Specifications</b>		<b>Warm-up time</b>	Approx. 34 seconds from power ON
<b>Copy speed (BW/Colour)</b>	Please refer to the quoted print speeds	<b>Recovery from sleep mode</b>	10 seconds or less
<b>First Copy Output Time (FCOT) (BW/Colour)</b>	C1335iF: 5.9 sec / 7.4 sec C1325iF: 8.4 sec / 10.5 sec	<b>Interface type</b>	USB 2.0 Hi-Speed, 1000BaseT / 100Base-TX / 10Base-T, 1 x USB Host (Front), 1 x USB Host (Rear), 1 x USB device Recommended third party wireless solution is Silix SX-BR-4600 WAN For more details please refer to <a href="http://www.silix-europe.com">www.silix-europe.com</a>
<b>Copy resolution</b>	Reading: 600 dpi x 600 dpi Printing: 600 dpi x 600 dpi	<b>Network protocols</b>	TCP / IP* (LPD / Port 9100 / WSD / IPP / IPPS / SMB / FTP), IPX / SPX (NDS, Bindery) *IPv4 / IPv6 support
<b>Multiple copy</b>	Up to 999 copies	<b>Memory</b>	1.0 GB
<b>Reduction/Enlargement</b>	Zoom: 25 - 400 % in 1 % increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%	<b>Control panel</b>	QVGA Color LCD 8.9 cm (3.5 inch) touch / swipe supported display
		<b>Dimensions (W x D x H)</b>	Standard: C1325iF 511 mm x 549 mm x 610 mm C1335iF 511 mm x 564 mm x 610 mm
<b>Scan Specifications</b>			Optional: C1325iF With Cassette Feeding Unit-AJ1: 511 mm x 549 mm x 1035 mm C1325iF With Cassette Feeding Unit-AK1: 511 mm x 549 mm x 1035 mm C1325iF With Plain Pedestal Type-F1: 511 mm x 549 mm x 1035 mm C1335iF With Cassette Feeding Unit-AJ1: 511 mm x 564 mm x 1035 mm C1335iF With Cassette Feeding Unit-AK1: 511 mm x 564 mm x 1035 mm C1335iF With Plain Pedestal Type-F1: 511 mm x 564 mm x 1035 mm
<b>Optional/Standard</b>	Standard on all models (DADF 50 sheets)		
<b>Supported media size/s</b>	A4, A5, B5, Custom sizes: 140 mm to 216 mm x 128 mm to 356 mm (when fed through the DADF)		

## Installation space (W x D)

C1325iF: 852 mm x 843 mm  
 (Main unit + Multi-purpose tray open + Cassette drawers open)  
 C1335iF: 852 mm x 858 mm  
 (Main unit + Multi-purpose tray open + Cassette drawers open)

## Weight

Approx. 43 kg excluding toner

## Operating environment

Temperature: 10 to 30°C (50 to 86°F)  
 Humidity: 20 to 80 % RH (no condensation)

## Power source

220 - 240 V (±10 %), 50 / 60 Hz (±2 Hz), 3.7 AMP

## Power consumption

Maximum: Approx. 1.5 KW  
 Standby: Approx. 30 W  
 Sleep mode: Approx. 1.0 W or less<sup>2</sup>  
 Time to put the device to sleep mode: 60 sec  
 Typical Electricity Consumption (TEC) rating<sup>3</sup>:  
 1.2 kWh (C1335iF) / 0.8 kWh (C1225iF)

## Noise levels

### Sound Pressure<sup>4</sup> (reference data, LpAm, Bystander's position)

Sound Pressure Noise Levels:  
 C1325iF  
 Active: 50 dB  
 Standby: Inaudible (Less than 30dB)  
 C1335iF  
 Active: 51 dB  
 Standby: Inaudible (Less than 30dB)

## Software and printer management

**iW Management Console:** Server-based software for centralised management of a fleet of devices  
**eMaintenance:** embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.  
**Remote Firmware System (GDLS):** Allows the remote distribution of firmware.  
**Remote User Interface (RUI):** Web-based interface to each device that helps to provide remote device management and control.  
**Canon Driver Configuration Tool:** A utility for changing the factory default settings of Canon print drivers  
 Standard:  
 IP / Mac Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X, Secured Print, Department ID  
 Optional:  
 Send PDF Security Feature Set-E1 @E  
 The following items require uniFLOW: My Print Anywhere secure print, Data Loss Prevention.

## Security features

## Consumables

### Toner bottle

C-EXV 48 Black/Cyan/Magenta/Yellow Toner (Yield: BK 16,500 / CMY 11,500 pages)<sup>5</sup>

## Specifications for options

### Cassette feeding unit

Name: Cassette Feeding Unit-AJ1  
 Description: Optional cassette feeding unit with 1 x 550 sheets paper capacity. Takes the cassette paper capacity up to 1,200 sheets.  
 Dimensions (W x D x H): 511 mm x 508 mm x 425 mm  
 Weight: Approx. 19 kg

### Hardware accessories 1

Name: Cassette Feeding Unit-AK1  
 Description: Optional cassette feeding unit with 3 x 550 sheets paper capacity. Takes the cassette paper capacity up to 2,300 sheets.  
 Dimensions (W x D x H): 511 mm x 508 mm x 425 mm  
 Weight: Approx. 19 kg

### Hardware accessories 2

Plain Pedestal Type-F1: The pedestal can be placed under the standard cassette module to raise the device when free-standing. (Height of Pedestal: 426 mm)  
 Copy Card Reader Attachment-H1:  
 HANDSET-J1 EUR / HANDSET-J1 SA:  
 Copy Card Reader-F1:  
 MICARD Attachment Kit-A1:

### Print controller accessories

BARCODE PRINTING KIT-D1 @E: Enables barcode printing via jet caps technology.  
 Copy Control Interface Kit-C1: Allows connection (CCVI I / F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.

### System accessories

Send PDF Security Feature Set-E1 @E: Send encrypted PDF and add digital device signature to PDF files.

### Document security accessories

ADF ACCESS HANDLE-A1: Attaches to the document feeder, making access easier for seated users.

### Accessibility accessories

## Footnotes

<sup>1</sup> Based on ITU-T Standard Chart No. 1

<sup>2</sup> 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information

<sup>3</sup> Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by Energy Star (<http://www.eu-energystar.org>).

<sup>4</sup> Declared noise emission in accordance with ISO 7779

<sup>5</sup> Based on 5% coverage (A4)

All specifications subject to change without notice



Office Technology (irl) Ltd  
 Technology House  
 Riverview Business Park  
 Nangor Road  
 Dublin 12  
 Telephone no 01-460 4444  
 Facsimile no 01-460 3333  
[www.officetechology.ie](http://www.officetechology.ie)

